

Commercial Elevators

City 400



City 400 lift solution by KLEEMANN is designed to meet the demanding needs of commercial buildings. Built for durability and high-traffic, it combines robust performance with exceptional reliability. With a travel height of up to 60 meters, City 400 outperforms mid-rise standards and ensures seamless operation in busy environments.

Choose City 400 for a commercial elevator solution that stands for **endurance, efficiency, and KLEEMANN's trusted expertise.**



Contents

OVERVIEW	4	OPERATING PANELS & DOORS	29
City 400	4	Surface mounted	30
		Flush mounted	31
		Buttons & Doors	32
ADVANTAGES	9		
Optimized shaft efficiency	10	KEY FEATURES & PLANNING DATA	35
Sustainable design & energy efficiency	12	Product fact sheet	36
Comfort & versatile design	14	Planning data	38
Digital connectivity	16		
DESIGN OPTIONS	19		
Purity S	20		
Purity C	22		
Purity E	24		
Interior materials	26		

City series by KLEEMANN

The next generation
of traction MRL lifts

With the City series, you can explore a whole range of advantages, including space savings, rapid installation, reduced total cost of ownership, energy efficiency, remote monitoring, as well as a smooth and safe ride.

City 100

For low-rise & low-traffic buildings

City 300

For mid-rise & mid-traffic residential & commercial buildings

City 400

For mid-rise & high-traffic commercial buildings



City 400

Engineered for performance, City 400 is the ideal choice for mid-rise and high-traffic buildings. It guarantees smooth rides and consistent operation needed in demanding environments.



Technical specifications

Model	City 400
Rated load (Kg)	630-1050
Max travel (m)	60
Max number of stops	17
Max speed (m/s)	1,6
Max persons	14
Min pit depth (mm)	900
Min headroom (mm)	3300
Complies with	Lifts directive 2014/33/EU

Recommended uses

Commercial buildings
High-traffic & mid-rise buildings



Description & features

City 400, equipped with the high-quality European Ziehl-Abegg machine, delivers superior strength, smooth rides, and added value to your project – making it the ideal choice for luxurious projects. Its integrated digital tools and versatile design make it a flexible solution, easily adaptable to the requirements of mid-rise and high-traffic commercial buildings with demanding specifications.

City 400 also offers efficient shaft dimensions, allowing for the recovery of valuable space and reducing installation time. Its eco-friendly design and high-quality materials, both in construction and packaging, contribute to reducing the building's overall carbon footprint and enhancing its sustainability.

Optimized shaft efficiency

A design that saves up to 50mm in shaft width or allows the accommodation of an additional passenger in the cabin.

Superior engineering and design


Engineered to meet the standards of a remarkably smooth ride, City 400 offers a variety of quality materials to encourage a mix and match approach and enable the process of creating the right look and feel.

Sustainable design

City 400 helps buildings reduce carbon emissions with its eco-friendly design and packaging while also boosting property value. With a lighter weight and a construction that requires no welding and minimal use of paint, it is perfect for eco-conscious projects.

Advanced digital connectivity

City 400 integrates advanced digital tools, including KLEEMANN Live and Lift Control for remote elevator control via mobile. Embrace digital convenience by exclusively ordering City 400 online through our KLEEMANN Portal.

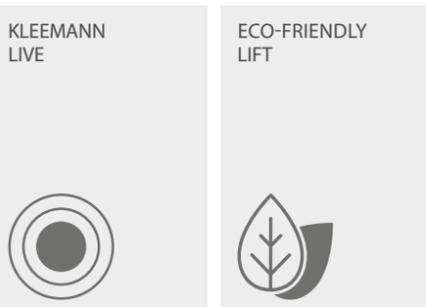

Extra features & upgrades






Advantages City 400




Optimized shaft efficiency

You can either choose to use a smaller shaft up to 50 mm for a building or fit an extra person per lift on a standard shaft. The City 400 design maximizes this potential and minimizes the installation time reducing the overall building's operating and ownership costs.


Free up to 3% more floor space per lift.

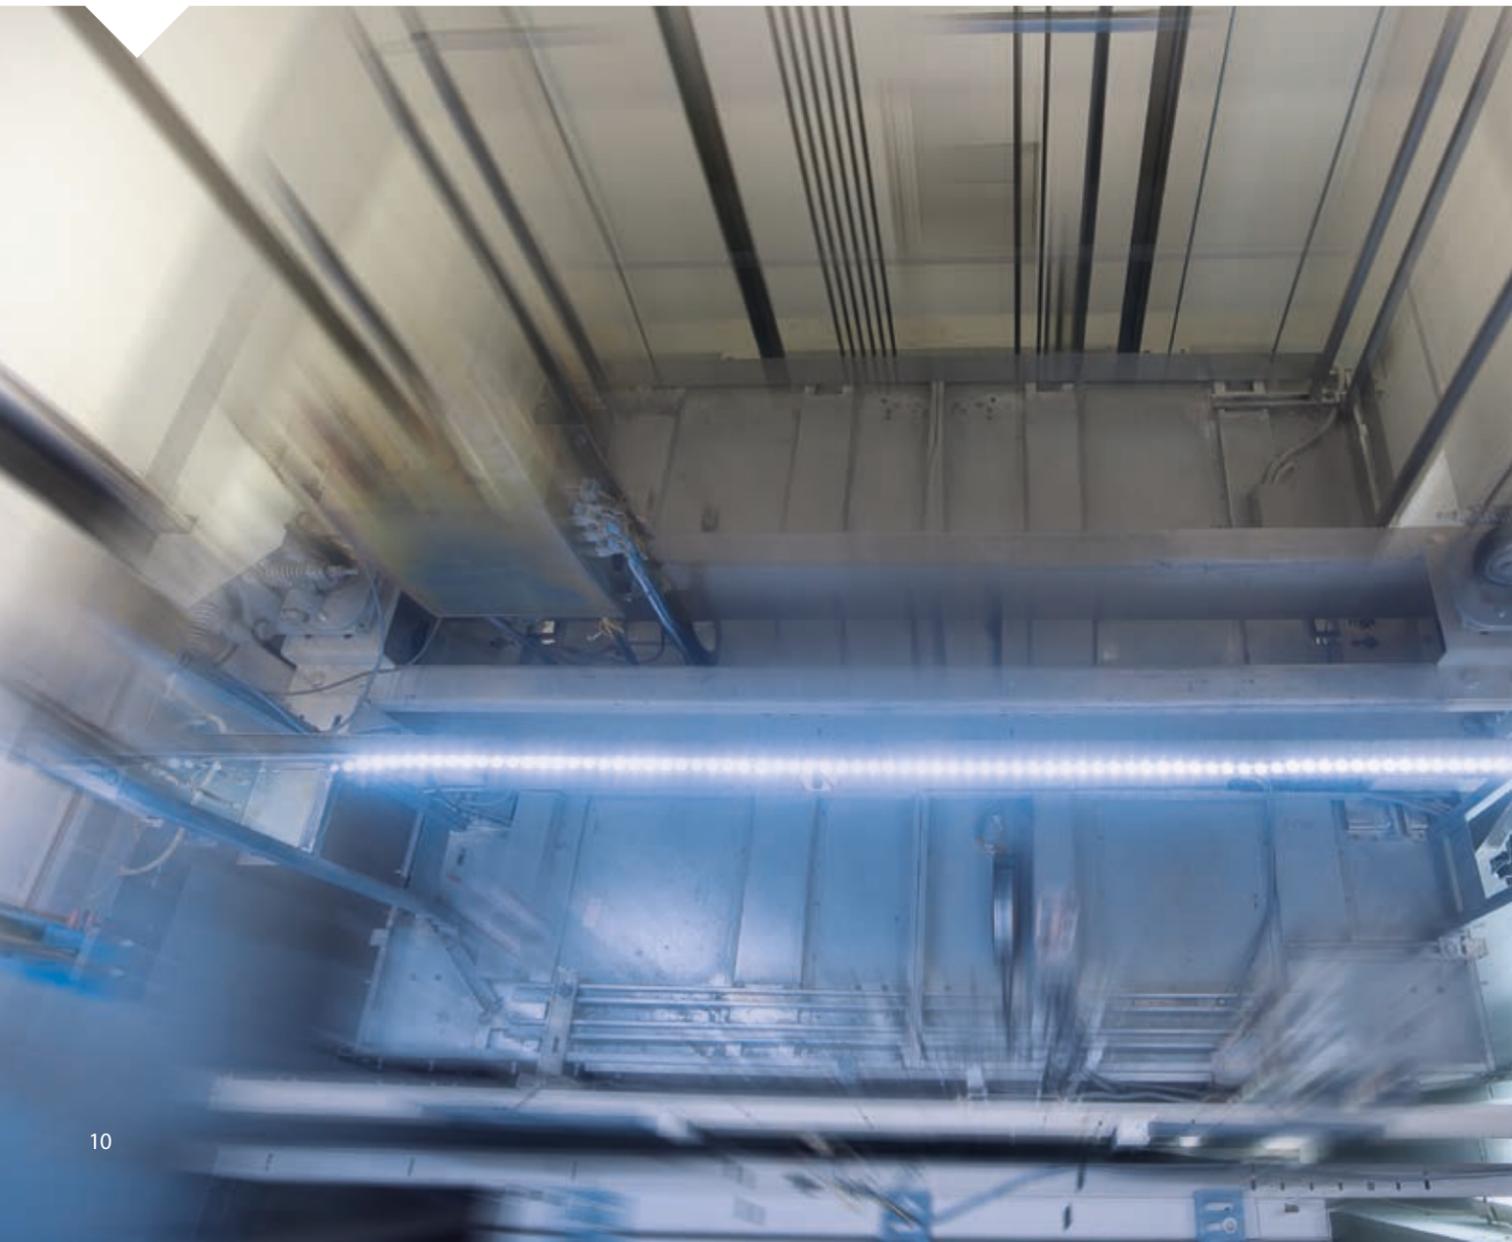

Increased floor area

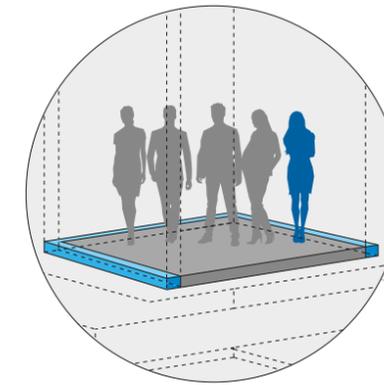

You can now fit an extra person per City 400 lift on a standard shaft

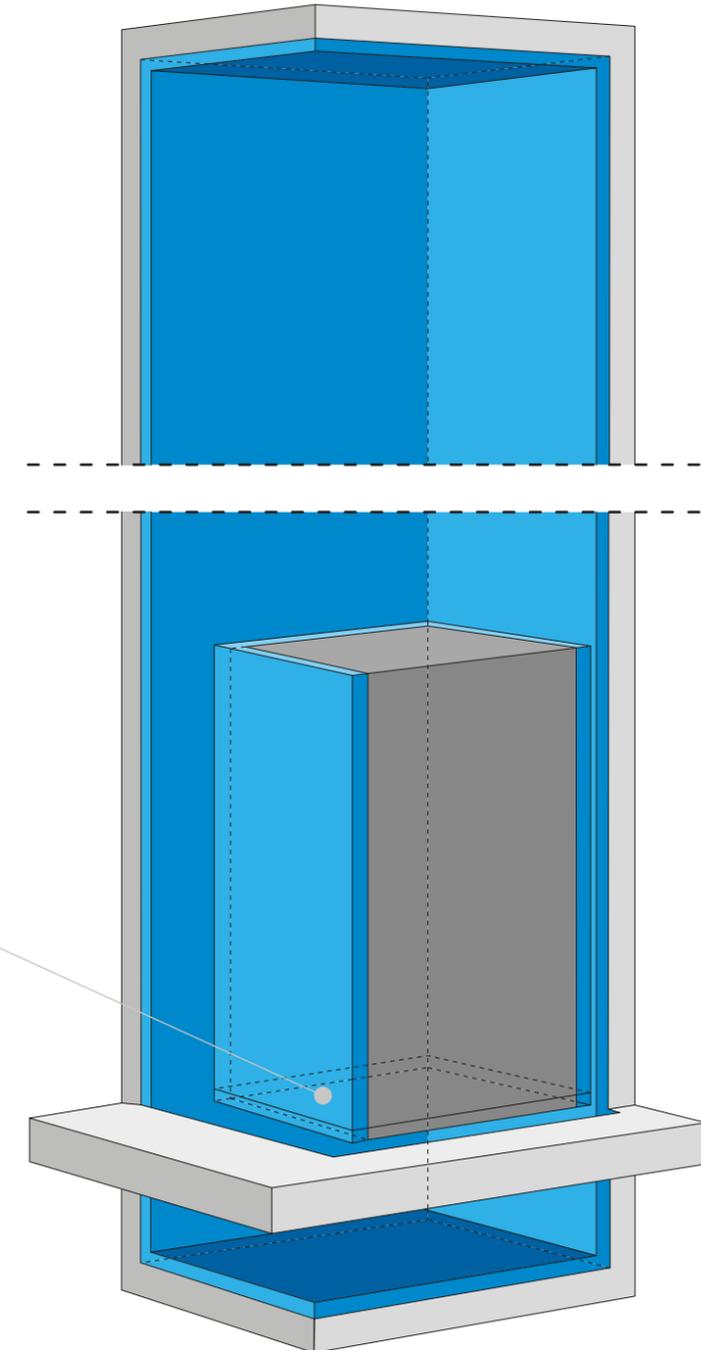

Quick & smooth installation

The installation of the City 400 is completed faster due to its pre-engineered components, the final fitting and placement of the cabin and the counterweight frames require tightening fewer than 70 flanged nuts and bolts, without the need for gears or safety washers. Increased shaft tolerances and the absence of supporting bases on the walls ensure no drilling at higher levels in the shaft.

Sustainable design & energy efficiency

City 400 stands out with top certifications, reduced CO₂ emissions, and remarkable energy efficiency. The eco-friendly design of City 400 meets the criteria of the BREEAM and LEED assessment methods, enhancing building sustainability, environmental performance, and property value.

City 400 uses environmentally friendly materials, with no welding and minimal use of paint. Experience superior performance, sustainability, and cost savings with the City 400 lift solution.

Attributes

Energy-saving performance

Equipped with energy-saving features such as standby mode, LED lights, and the optional Regen Drive, City 400 can save up to 40% compared to a typical commercial lift. City 400 meets ISO 25745-2 and VDI 47071 standards, showcasing outstanding energy efficiency.

Eco-friendly materials and engineering


Constructed from environmentally friendly materials, City 400 avoids hazardous substances, requires no welding and uses minimal paint.

Reduced CO₂ emissions

With lighter packaging and a new design a standard 8-person, 5-stop City 400 is 400 kg lighter than previous commercial models. This results in an average of 10% fuel savings during transportation and roughly 11% less space when packaged.

Maintenance and longevity

Equipped with KLEEMANN Live, the IoT system that collects, transmits, and analyzes data and information for the elevators remotely in real-time, City 400 reduces significantly the frequency of unscheduled maintenance visits, prolonging the lift's service life.

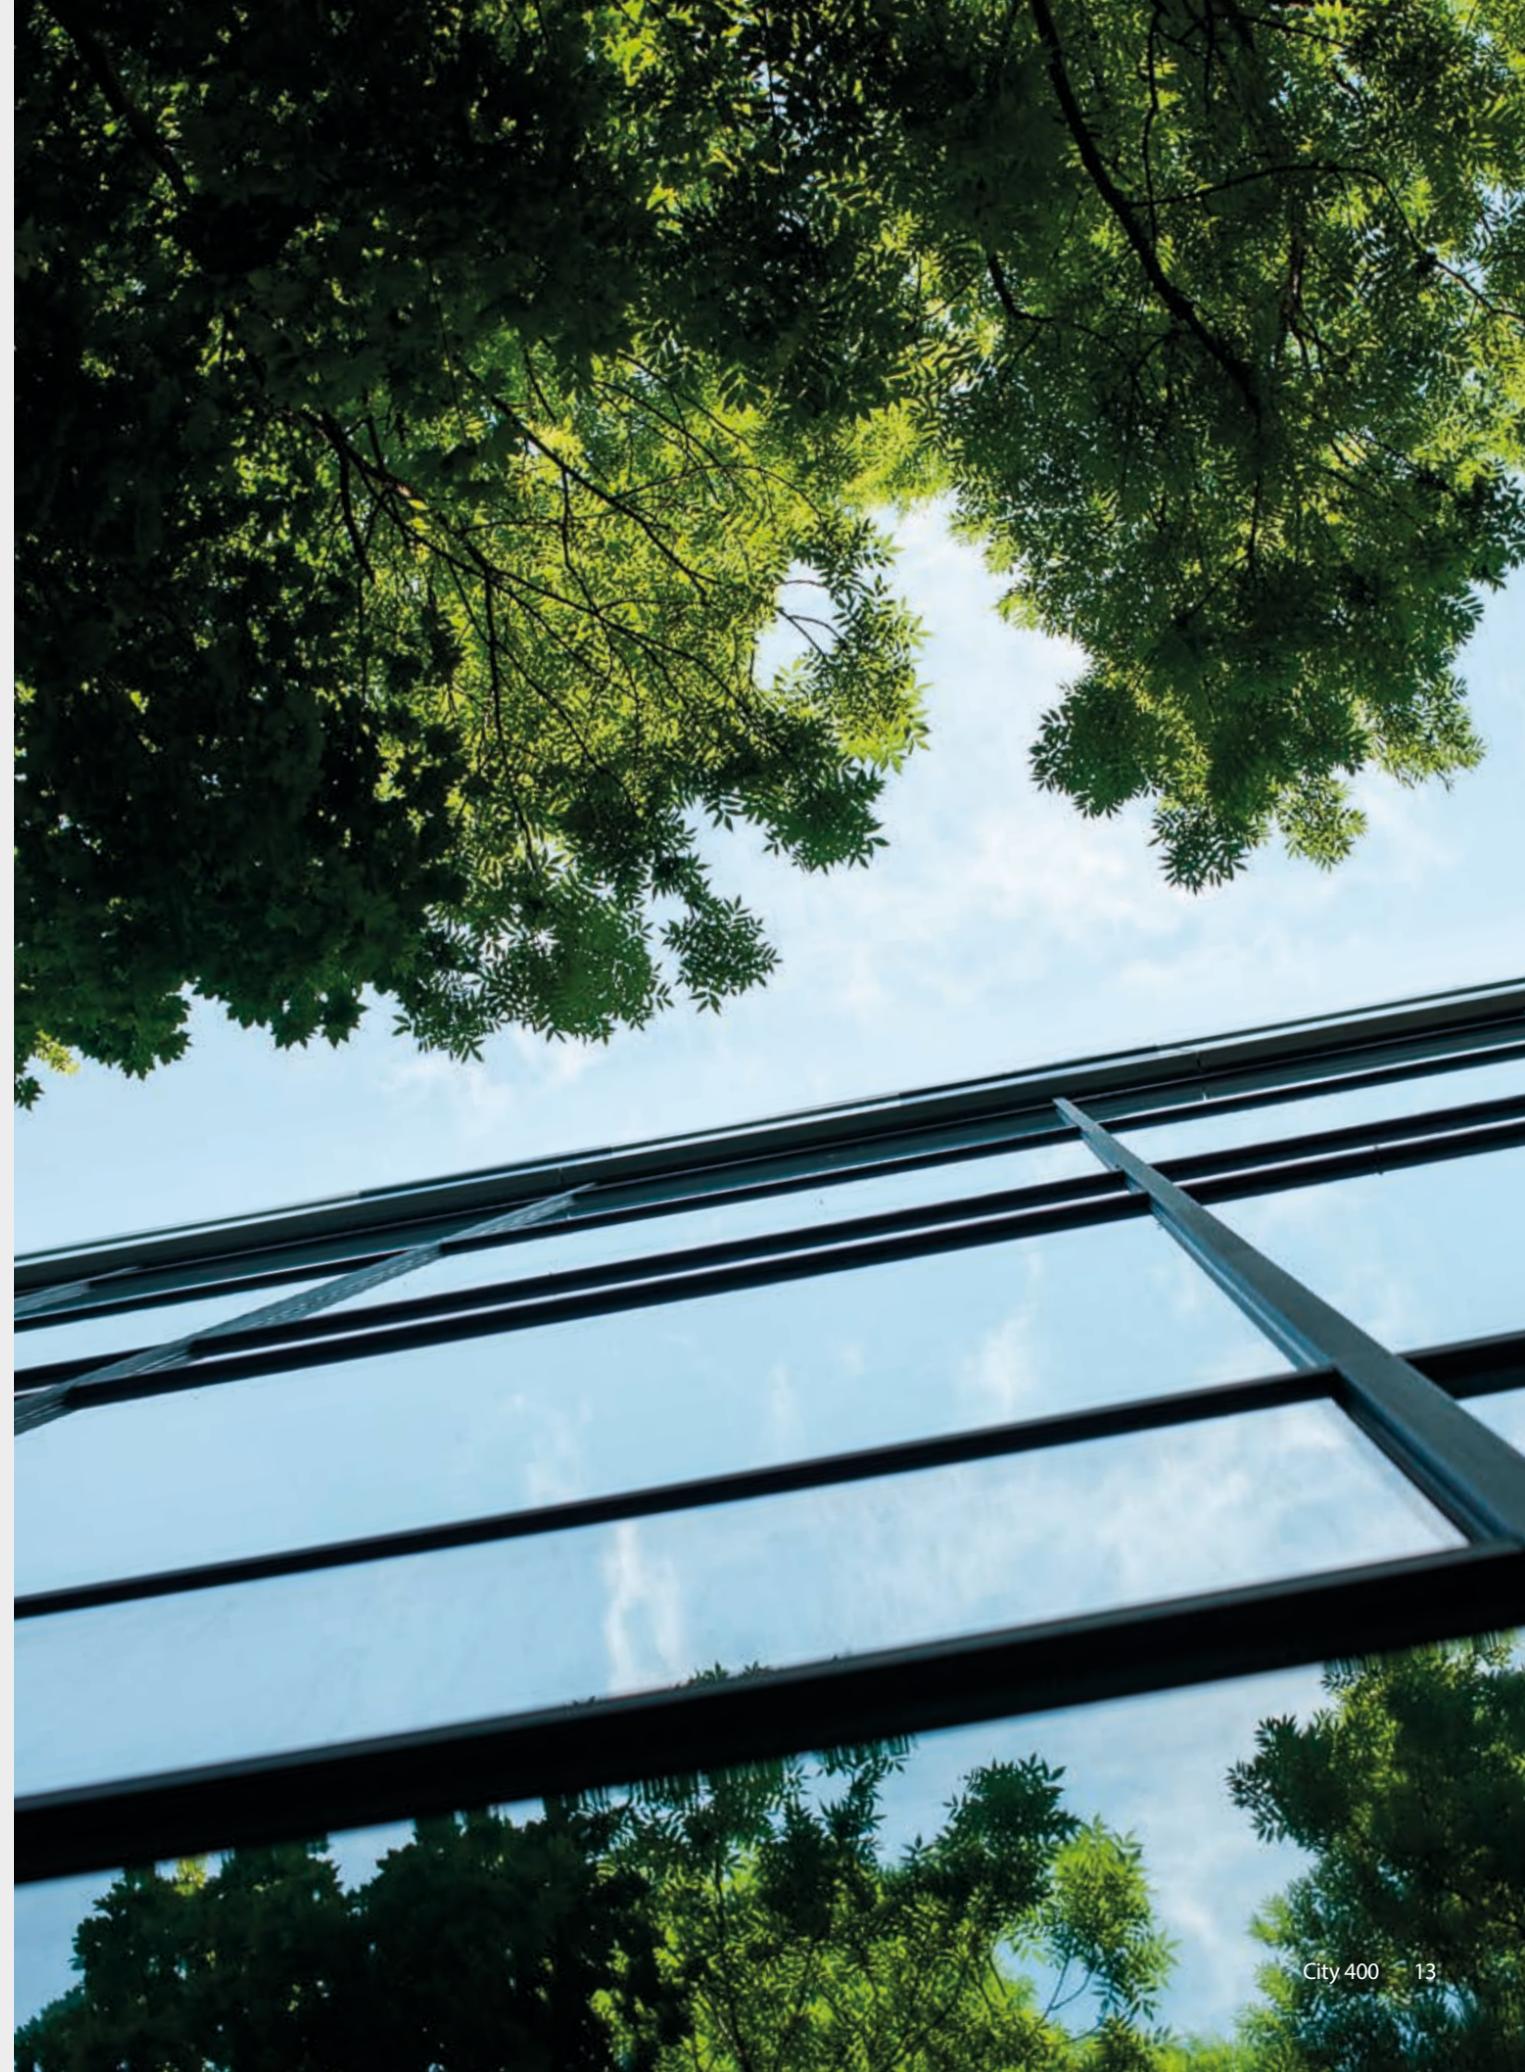



Comfort & versatile design

Ride quality

City 400 delivers precise floor alignment with a stopping accuracy of ± 1 mm and maintains noise levels as low as 52 dB inside the cabin, fully complying with legal construction regulations to ensure a quiet and comfortable experience.



Range of design

Choose from KLEEMANN's standard range of materials, or customize your product by selecting from a wide range of floor and wall premium finishes to perfectly fit your space and meet your requirements.



Accessibility

City 400 meets all the requirements of standard 81.70, which enhances accessibility with solutions such as direct transmission of voice commands to the headphones of passengers with hearing impairments, through FM signals.



Automatic evacuation

Option for automatic evacuation, which, in case of a power failure, safely transports passengers to the nearest floor, where the doors open automatically for a secure exit.

Digital connectivity

Advanced digital connectivity is seamlessly integrated into the City 400 operation through KLEEMANN Live, elevating the lift experience to its optimum potential. Moreover, City 400 is available online via KLEEMANN Portal, offering an exclusive, easy and efficient purchase.



KLEEMANN Live

Take full control of your lift operations 24/7 through a comprehensive solution that enhances elevator management with remote monitoring, preventive maintenance and real-time data insights & statistics. Improve efficiency, reduce costs and ensure peace of mind for you and your customers.

Easy remote access

Available for desktop or smart device

- Monitor the current elevator status
- Receive real-time notifications for events & errors
- Get suggestive actions for preventive alerts
- View, edit & compare GENIUS20 controller parameters
- Inspect rides quality & statistics insights
- Reset safely & remotely non-critical errors

Benefits

SAVE TIME & MONEY

- Reduce on-site visits and shorten their duration
- Minimize downtime and resolve issues remotely when possible
- Provide preventive support to extend equipment lifespan

GROW YOUR BUSINESS

- Expand and support more contracts with the same team
- Offer flexible solutions to your customers and increase satisfaction
- Build trust and elevate your professional image through innovation

POWER UP YOUR PERFORMANCE

- Strengthen team collaboration and optimize resource planning
- Demonstrate professionalism and accountability
- Enhance technical capabilities and service delivery

Mobile & Tablet Apps



live.kleemannlifts.com

LIFT CONTROL PRO

Elevate Maintenance Efficiency: Download the app, connect and manage elevators anywhere anytime with Lift Control Pro, a user-friendly smart device application that allows you to use the majority of KLEEMANN Live functions.

LIFT CONTROL

Offer to your customers (facility managers, building owners etc.) access to Lift Control, a intuitive smart device application that promotes transparency and demonstrates clear evidence of service effectiveness.

Access the platform anytime using your KLEEMANN credentials

KLEEMANN Portal

Contact your sales engineer to get access to the portal

Available for desktop or smart device

KLEEMANN Portal has been designed and developed with your needs in mind. It is a platform that allows you to quickly and easily create and receive plans and quotes, as well as place your elevator order electronically.

Simply choose the cabin dimensions you want to generate accurate and realistic 3D plans and views.

With the KLEEMANN Portal, you also have the ability to browse your history to retrieve data and download details of previous quotes. You can also navigate your offers' history to retrieve and download the details of previous offers and quotes, request the creation of new drawings and plans and check your order status.

Features & Highlights

Features

- Detailed designs and quotes
- Integrated cabin design options. Real-time changes.
- More than one shaft dimension option for the given cabin dimensions
- Realistic 3D plans and views. Real-time changes.
- Auto correction
- Installation plans generated by the KLEEMANN Portal
- Responsive web design (for desktop, tablet or mobile devices)

Highlights

- Offer available in 5 minutes
- Planning data available in 10 minutes
- Online order
- Ease of use and flexibility
- Upgraded user experience
- Fast delivery time

portal.kleemannlifts.com



Design options City 400



Purity S

City 400 is provided with the Purity S cabin, which combines durability and simplicity. It enables easy installation from within the cabin, a design free from visible screws, and a new packaging that significantly reduces installation time.


Walls Stainless steel linen
Ceiling C11
Floor Artificial Granite Regal Black
Handrail K2



Stainless steel



Satin 304

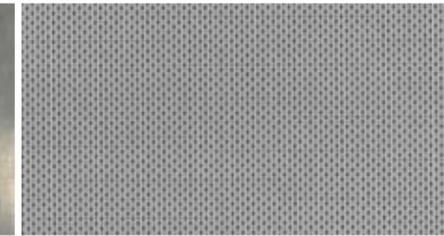


Linen



Mirror



Checks

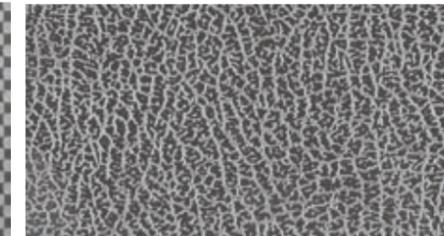

12LG

Skinplate




A90 GTA



F12 PPS



PPS 13

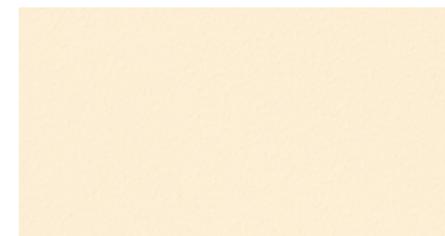

A67 SMA



PPS 93



N195A

Paint



Liquid Pencil

Pale Code

Abstract Light

Reflex Grey

White Utopia

Grey Flux

Deep Space

Radical Black



Skylight White



Grizo



Silvertone



Fiction Gold



Eclectic Bronze



Flashy Warm



Copper Swift

Colors may differ slightly from those shown in the brochure, owing to the limitations of the printing process.

Pictures of the materials illustrate detailed part of each material and not its rendering on the cabin surface.



Purity C

City 400 is also provided with Purity C, a cabin that embraces the freshness of architectural trends. With a modern edge that seamlessly aligns into the environment, it also ensures easy installation from within the cabin.

Walls Concrete like blush box
Ceiling C50
Floor Vinyl mosaicon
Handrail K2



Wood like



Timber Variant



Smooth Sand



Hacienda Wood

Concrete like



Carrara Frost



Blush Box



Lime Light



Cloud Lime

Steel like



Mighty Silver



Bronzo



Oceanic Blue

Colors may differ slightly from those shown in the brochure, owing to the limitations of the printing process.

Pictures of the materials illustrate detailed part of each material and not its rendering on the cabin surface.



Purity E

City 400 is provided with Purity E, a cabin where sophistication meets innovative design. Available in three distinctive wood like finishes, each boasting three unique engraving modes (horizontal, vertical and thick lines), the Purity E offers nine exclusive options to decorate your cabin.

with thick lines

Walls Wood like vorion wood
Ceiling C51
Floor Vinyl mosaicon
Handrail K2



Wood like



Ecliptic Black

Vorion Wood

Wood Mark



with horizontal lines

Wall Wood like Ecliptic Black
Ceiling C40
Floor Artificial Granite Regal Beige
Handrail K2



with vertical lines


Wall Wood like Wood Mark
Ceiling C41
Floor Vinyl Light Cement
Handrail K2



Interior materials

Floors


Artificial granites

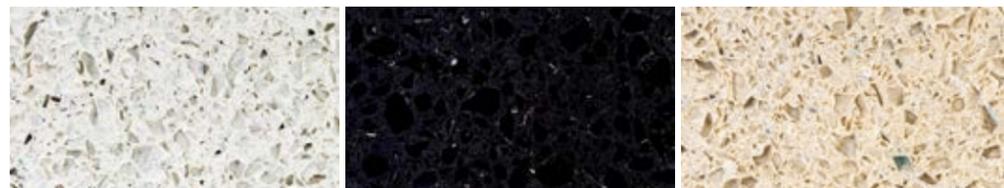

Regal White

Regal Black

Regal Beige

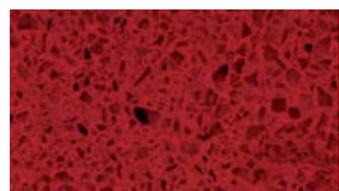

Regal Red

Vinyls



Light Cement

Concrete Vibe

Oxytone Concrete



Mosaicon

Timber Tone

Black Luxe


Ceilings

AVAILABLE FINISH

Mirror



C11

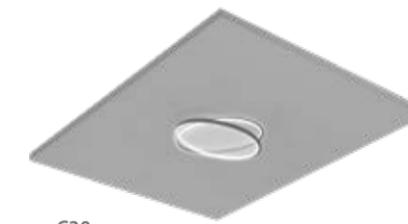


C30



C40




C41

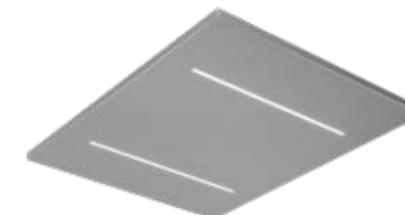

C50



C51

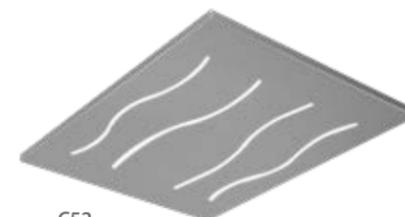

C52



O55

Handrails

AVAILABLE FINISH

Mirror



K2



K3

According to EN81-70



Design options

Operating panels & Doors

City 400




Surface Mounted



Car Operating Panels

HALO SC600 DIMENSIONS
(W) 225 mm x (D) 14 mm x (H) 1900 mm

HALO SC500 DIMENSIONS
(W) 225 mm x (D) 14 mm x (H) 1000 mm

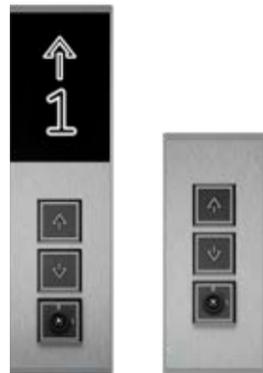

Landing Operating Panels

HALO SL631 DIMENSIONS WITH DISPLAY
(W) 95 mm x (D) 14 mm x (H) 335 mm

HALO SL630 DIMENSIONS WITHOUT DISPLAY
(W) 95 mm x (D) 14 mm x (H) 225 mm



Landing Indicator

HALO SH600 DIMENSIONS
(W) 335 mm x (D) 14 mm x (H) 95 mm

Characteristics

- Ultra slim design at 14mm depth
- Compatible only with buttons H40Q, with white illumination
- KLEEMANN CAN open bus communication
- Available with white dot matrix & TFT display
- Black glass with Stainless Steel satin finishing
- Full length white led illumination at both sides

Flush Mounted



Car Operating Panel

AKC BES DIMENSIONS
(W) 200 mm x (H) 1900 mm



Landing Indicator
NEXT DIRECTION ARROWS



Landing Operating Panels

AKL DIMENSIONS
(W) 85 mm x (H) 265 mm



Landing Indicator

P95-902 DIMENSIONS
(W) 230 mm x (D) 20 mm x (H) 92 mm

Characteristics


- Available with dot matrix & TFT display
- Compatible with buttons MT-42 & RT-42



Stainless steel



Satin 304

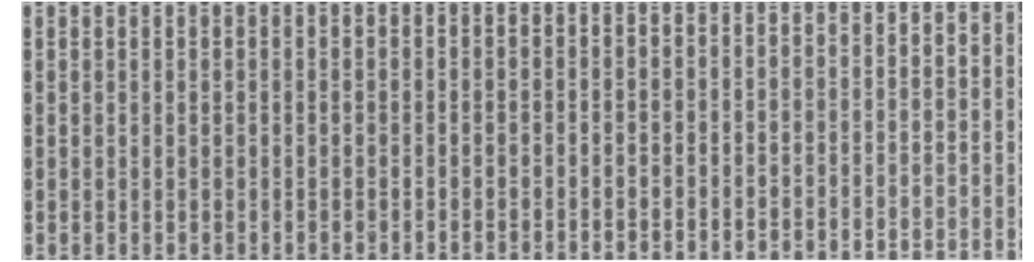

Linen

Buttons



MT42
DIMENSIONS
(W) 39 mm x (Y) 39 mm



MT42 according to EN81-70
DIMENSIONS
(W) 39 mm x (Y) 39 mm



H40Q
DIMENSIONS
(W) 40 mm x (Y) 40 mm



RT42
DIMENSIONS
ø 30 mm



RT42 according to EN81-70
DIMENSIONS
ø 30 mm

Doors



Automatic
Telescopic



Automatic
Central

Paint



Colors may differ slightly from those shown in the brochure, owing to the limitations of the printing process.

Pictures of the materials illustrate detailed part of each material and not its rendering on the cabin surface.



Key features & Planning data City 400

Product fact sheet

● Default ○ Optional □ Standard

Lift features	City 400
Performance	
Advanced door opening	○
Full load	●
Premium doors	●
Reinforced door mechanism	○
Relevelling	●
Parking level in main floor	○
Remote Monitoring (KLEEMANN Live)	●
Energy saving	
Energy saving LED lighting	●
Standby mode	○
LSHF Wiring	○
Oil collection base (Basins)	□
Overload on wire ropes	□
Safety & regulations	
Full height safety edge (Light curtain)	●
Emergency light	●
Automatic evacuation	○
Fireproof doors E120	●
EN 81-20	●
EN 81-28, Emergency call system	●
EN 81-70, Accessibility to lifts	○
EN 81-73, Fire evacuation	○


Lift features	City 400
Accessibility & comfort	
Door open button	●
Door close button	○
Inductive loop for hearing-impaired passengers	○
Audible floor announcement	○
Main floor push button with round green frame	○
Out of order key switch	○
Car attendant (via keyswitch)	○
Car ventilation fan	○
Elevator air purifier	○
Shaft & landings	
Ankerschiene	○
Full façade	○
Infill Panels	○
Controller in door frame - At top floor	○
Controller in door frame - At second to top floor	○
Digital & electronics	
Controller hand terminal	○
CCTV cable	○
Installation & maintenance	
Pendant station	○
Guide alignment tool	○
Motor elevation system	○

Planning data

Shaft layout

- SH Shaft headroom
- SP Shaft pit
- CH Cabin height
- DH Door height
- TH Travel height


- SH 3300/3400/3500 mm
- SP Standard from 900 mm
- CH 2100/2200/2300 mm
- DH 2000/2100/2200 mm
- TH Maximum 45000 mm

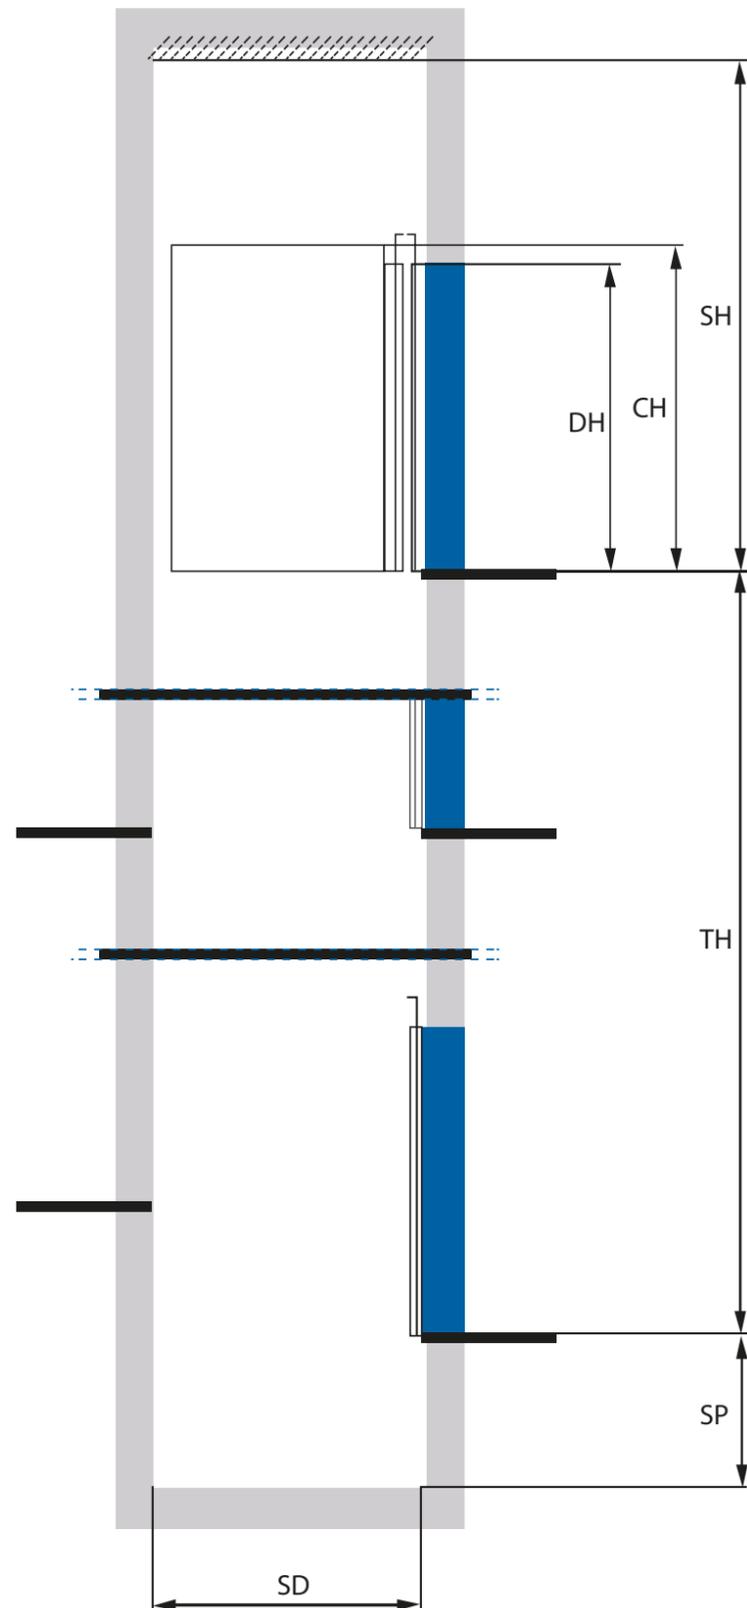


Door options

- SW Shaft width
- DO Door opening
- CW Cabin width
- CD Cabin depth
- SD Shaft depth

2P-Side

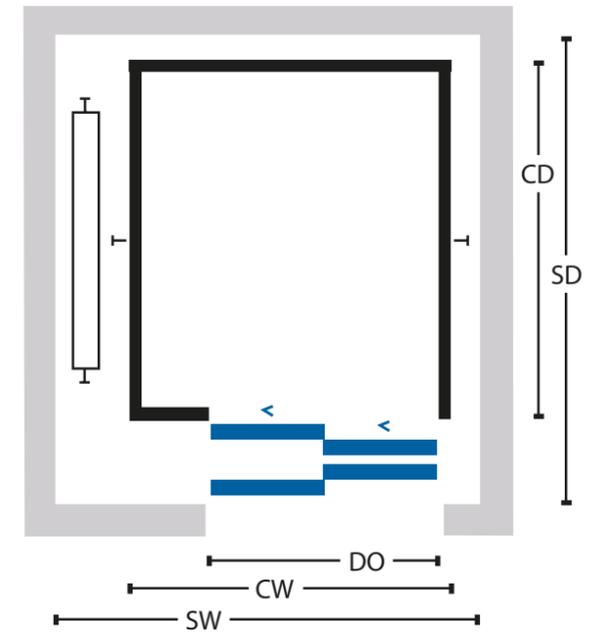

2P-Central

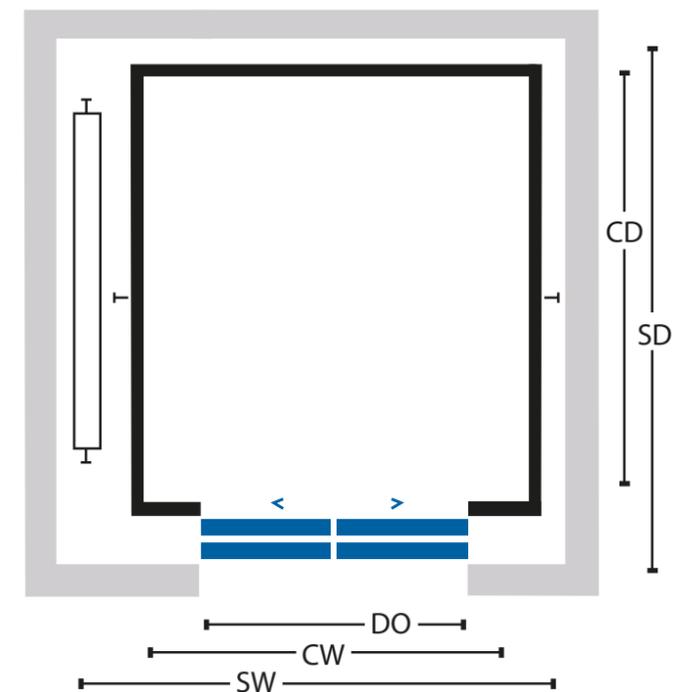

Planning data

BASIC INFO			CABIN INFO		DOOR INFO			SHAFT INFO		
Rated load 	Passengers 	Speed 	Cabin dimensions (WxD) (front entrance only) 	Cabin height 	Door type 	Door opening 	Door height 	Shaft Dimensions (WxD) (front entrance only) 	Shaft pit 	Shaft headroom 
kg	No	m/s	mm	mm		mm	mm	mm	mm	mm
630	8	1	1100 x 1400	2100/2200/2300	2P-Side*	850	2000/2100/2200	1550 x 1750	900	3300/3400/3500
630	8	1	1100 x 1400	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 1750	900	3300/3400/3500
630	8	1.6	1100 x 1400	2100/2200/2300	2P-Side*	850	2000/2100/2200	1550 x 1750	1030	3500/3600/3700
630	8	1.6	1100 x 1400	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 1750	1030	3500/3600/3700
675	9	1	1150 x 1400	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 1750	950	3300/3400/3500
675	9	1.6	1150 x 1400	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 1750	1030	3500/3600/3700
800	10	1	1350 x 1400	2100/2200/2300	2P-Side*	1000	2000/2100/2200	1800 x 1750	950	3300/3400/3500
800	10	1.6	1350 x 1400	2100/2200/2300	2P-Side*	1000	2000/2100/2200	1800 x 1750	1030	3500/3600/3700
1000	13/14	1	1100 x 2100	2100/2200/2300	2P-Side*	850	2000/2100/2200	1550 x 2450	950	3300/3400/3500
1000	13/14	1	1100 x 2100	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 2450	950	3300/3400/3500
1000	13/14	1	1400 x 1600	2100/2200/2300	2P-Side*	1000	2000/2100/2200	1900 x 1950	950	3300/3400/3500
1000	13/14	1.6	1100 x 2100	2100/2200/2300	2P-Side*	850	2000/2100/2200	1550 x 2450	1030	3500/3600/3700
1000	13/14	1.6	1100 x 2100	2100/2200/2300	2P-Side*	900	2000/2100/2200	1600 x 2450	1030	3500/3600/3700
1000	13/14	1.6	1400 x 1600	2100/2200/2300	2P-Side*	1000	2000/2100/2200	1900 x 1950	1030	3500/3600/3700

*2P-Central are also available. All possible options & combinations can be found in KLEEMANN Portal.

www.kleemannlifts.com

KLEEMANN has a worldwide presence in over 100 countries with local presence in key market points. Constantly monitoring the global market trends, the company continues to innovate, grow, develop, and improve while consistently remaining in tune with its global character.



KLEEMANN
Your 1st Choice in Lifts

KLEEMANN HELLAS SA
Kilkis Industrial Area
P.O. BOX 25, Kilkis, 611 00 - Greece
G.E.M.I. 14486435000

Colors may differ slightly from those shown in the brochure, owing to the limitations of the printing process. Pictures of the materials illustrate detailed part of each material and not its rendering on the cabin surface.

While every effort has been made to ensure information accuracy, KLEEMANN bears no responsibility for typographic errors or omissions.

Copyright © KLEEMANN 2026

products-city_400-en-20260303